

AC6966B Datasheet

Zhuhai Jieli Technology Co.,LTD

Version: V1.6

Date: 2026.04.03

AC6966B Features

CPU

- 32-bit DSP supports hardware Float Point Unit (FPU)
- Up to 160MHz programmable processor
- 64 Vectored interrupts
- 8 Levels interrupt priority

DSP Audio Processing

- SBC, AAC Audio decodes supported for BT audio
- mSBC voice codecs supported for BT phone
- Supports MP2, MP3, WMA, APE, FLAC, AAC, MP4, M4A, WAV, AIF, AIFC audio decoding
- Packet Loss Concealment (PLC) for voice processing
- Acoustic echo cancellation/suppression (AEC, AES)
- One analog Environmental Noise Cancellation (ENC)
- Multi-band DRC limiter
- 10-band EQ configuration for voice Effects

Audio Codec

- Two channels 16-bit DAC, SNR >= 95dB
- One channels 16-bit ADC, SNR >= 90dB
- Sampling rates of 8KHz/11.025KHz/16KHz/22.05KHz/24KHz/32KHz/44.1KHz/48KHz are supported
- One analog MIC amplifier, build-in MIC bias generator
- Supports two PDM digital MIC inputs
- Two channels Mono analog MUX
- Supports cap-less, single-ended, and differential mode at the DAC path
- Supports 16ohm and 32ohm Speaker loading

Bluetooth

- Compliant with Bluetooth V6.0+BR+EDR+BLE specification (DN Q334307)

- Meet class2 and class3 transmitting power requirement
- Support GFSK and $\pi/4$ DQPSK all packet types
- Provides maximum +6dbm transmitting power
- Receiver with minimum -90dBm sensitivity
- Fast AGC for enhanced dynamic range
- Supports a2dp\avctp\avdtp\avrcp\hfp\spp\smp\att\gap\gatt\rfcomm\sdp\l2cap profile a2dp 1.4\avctp 1.4\avdtp 1.3\ avrcp 1.6.3\ hfp 1.9\spp 1.2\rfcomm 1.2\pnp 1.3\ hid 1.1.1\sdp core 6.0\l2cap core 6.0

Peripherals

- One full speed USB 2.0 OTG controller
- Six multi-function 32-bit timers, support capture and PWM mode
- Three full-duplex basic UART, UART0 and UART1 supports DMA mode
- Three SPI interface supports host and device mode
- One hardware IIC interface supports host and device mode
- 10-bit ADC for analog sampling
- External wake up/interrupt on all GPIOs

PMU

- Low voltage LDO for internal digital and analog circuit supply
- 3uA current consumption in the soft-off mode
- Built-in LDO for the core, I/O, Bluetooth and flash
- VBAT is 2.2V to 5.5V
- VDDIO is 2.2V to 3.6V

Packages

- QFN32(4mm*4mm)

Confidential

The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

Temperature

- Operating temperature: -40°C to +85°C
- Storage temperature: -65°C to +150°C

Applications

- Bluetooth headset
- Bluetooth Speaker



Confidential

The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

1、 Pin Definition

1.1 Pin Assignment

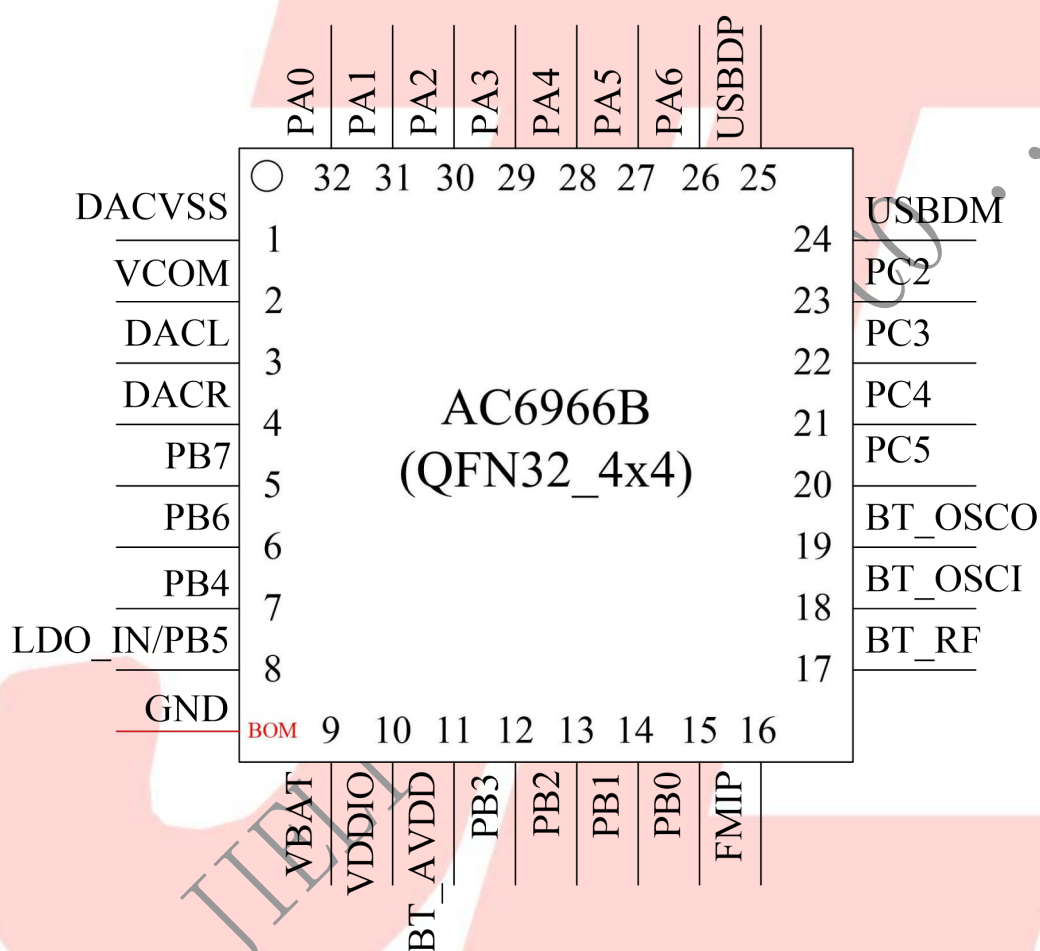


Figure 1-1 AC6966B_QFN32 Package Diagram

1.2 Pin Description

Table 1-1 AC6966B_QFN32 Pin Description

PIN NO.	Name	I/O Type	Drive (mA)	Function	Other Function
1	DACVSS	P	/		DAC Ground
2	VCOM		/		
3	DACL	O	/		DAC Left Channel
4	DACR	O	/		DAC Right Channel
5	PB7	I/O	24/8	GPIO	SD0CLK_BF: SD0Clock(BF) AMUX1R: Analog Channel1Right; SPI2DOA: SPI2 Data Out(A); IIC_SDA_C: IIC DAT(C); ADC9: ADC Input Channel 9; PWM5: Timer5 PWM Output; UART1RXA: Uart1 Data In(A);
6	PB6	I/O	24/8	GPIO	AMUX1L: Analog Channel1 Left; SPI2CLKA: SPI2 Data Out(A); IIC_SCL_C: IIC SCL(C); ADC8: ADC Input Channel 8; TMR3: Timer3 Clock Input; UART1TXA: Uart1 Data Out(A);
7	PB4	I/O	24/8	GPIO	SPI0_DAT2A(2): SPI0 Data2 Out_A(2); ADC7: ADC Input Channel 7; CLKOUT1 UART2TXC: Uart2 Data Out(C); UART2RXC: Uart2 Data In(C);
8	LDO_IN	P	/		Battery Charger In
	PB5	I/O	8	GPIO (High Voltage Resistance)	SPI2DIA: SPI2 Data Input(A); PWM3: Timer3 PWM Output; CAP1: Timer1 Capture; UART0TXC: Uart0 Data Out(C); UART0RXC: Uart0 Data In(C);
9	VBAT	P	/		Battery Power Supply
10	VDDIO	P	/		IO Power 3.3v
11	BT_AVDD	P	/		BT Power
12	PB3	I/O	/	GPIO	SD0DAT_D: SD0 Data(D); ADC6: ADC Input Channel 6; PWM2: Timer2 PWM Output;

Confidential

The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

					UART2RXB: Uart2 Data In(B);
13	PB2	I/O	8	GPIO (High Voltage Resistance)	SD0CMD_D: SD0 Command(D) SPI1DIA: SPI1 Data In(A); CAP0: Timer0 Capture; UART2TXB: Uart2 Data Out (B);
14	PB1	I/O	24/8	GPIO (pull up)	Long Press Reset; SPI1DOA: SPI1 Data Out(A); ADC5: ADC Input Channel 5; TMR2: Timer2 Clock Input; UART0RXB: Uart0 Data In(B); SPDIF_IN_D: Sony/Philips Digital Interface Input(D)
15	PB0	I/O	8	GPIO (High Voltage Resistance)	SD0CLK_D: SD0Clock(D) SPI1CLKA: SPI1 Clock(A); UART0TXB: Uart1 Data Out(B); TMR5: Timer5 Clock Input; SPDIF_IN_C: Sony/Philips Digital Interface Input(C)
16	FMIP	/	/		FM Antenna
17	BT_RF	/	/		BT Antenna
18	BT_SOC1	I	/		BT OSC In
19	BT_SOCO	O	/		BT OSC Out
20	PC5	I/O	24/8	GPIO	SD0CLK_AE: SD0 Clock(AE) SPI1DOB: SPI1 Data Out(B); IIC_SDA_B: IIC SDA(B); ADC12: ADC Input Channel 12; TMR1: Timer1 Clock Input; UART2RXD: Uart2 Data In(D);
21	PC4	I/O	24/8	GPIO	SD0CMD_A: SD0 Command(A); SPI0_DAT3AB(3): SPI0 Data3(AB); SPI1CLKB: SPI1 Clock(B); IIC_SCL_B: IIC SCL(B); ADC11: ADC Input Channel 11; PWM1: Timer1 PWM Output; UART2TXD: Uart2 Data Out (D);
22	PC3	I/O	24/8	GPIO	SD0DAT_A: SD0 Data(A); SPI0_DAT2B(2): SPI0 Data2(B); SPI1DIB: SPI1 Data In(B); CAP2: Timer2 Capture; UART0TXD: Uart0 Data Out (D); UART0RXD: Uart0 Data In(D);
23	PC2	I/O	24/8		SPI0_DIB(1): SPI0 Data Input(B);

Confidential

The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

					ALNK_MCLK_B: ALNK Master Clock(B); ADC10: ADC Input Channel 10; CAP5: Timer5 Capture; UART1RXB: Uart1 Data In(B);
24	USBDM	I/O	4	USB Negative Data (pull down)	SPI2DOB: SPI2 Data Out(B); IIC_SDA_A: IIC SDA(A); ADC14: ADC Input Channel 14; UART1RXD: Uart1 Data In(D);
25	USBDP	I/O	4	USB Positive Data (pull down)	SPI2CLKB: SPI2 Clock(B); IIC_SCL_A: IIC SCL(A); ADC13: ADC Input Channel 13; UART1TXD: Uart1 Data Output(D);
26	PA6	I/O	24/8		ALNK_DAT3_A: Audio Link Data3_A; ALNK_LRCK_B: Audio Link Word Select(B); IIC_SDA_D: IIC SDA(D); ADC4: ADC Input Channel 4; CAP4: Timer4 Capture; UART0RXA: Uart0 Data In(A); SPDIF_IN_B: Sony/Philips Digital Interface Input(B)
27	PA5	I/O	24/8		ALNK_DAT2_A: Audio Link Data2_A; ALNK_SCLK_B: Audio Link Serial Clock(B); IIC_SCL_D: IIC SCL(D); PWM0: Timer0 PWM Output; UART0TXA: Uart0 Data Output(A); SPDIF_IN_A: Sony/Philips Digital Interface Input(A)
28	PA4	I/O	24/8		SD0CMD_CE: SD0 Command(CE) AMUX0R: Analog Channel0 Right; PLNK_DAT1: PLNK Data1; ALNK_LRCK_A: Audio Link Word Select(A); ALNK_DAT3_B: Audio Link Data3_B; UART1_RTS: Uart1 Request to send; ADC3: ADC Input Channel 3; TMR4: Timer4 Clock Input; UART2RXA: Uart2 Data In(A);
29	PA3	I/O	24/8		SD0DAT_C: SD0 Data(C); AMUX0L: Analog Channel0 Left; PLNK_SCLK: PLNK Serial Clock;

Confidential

The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

					ALNK_SCLK_A: Audio Link Serial Clock(A); ALNK_DAT2_B: Audio Link Data2_B; UART1_CTS: Uart1 Clear to send; ADC2: ADC Input Channel 2; PWM5: Timer5 PWM Output; UART2TXA: Uart1 Data Output(D);
30	PA2	I/O	24/8	GPIO	SD0CLK_C: SD0 Clock(C); MIC_BIAS: Microphone Bias Output ALNK_MCLK_A: ALNK Master Clock_A; ALNK_DAT1_B: Audio Link Data1_B; CAP3: Timer3 Capture;
31	PA1	I	24/8		MIC: MIC Input Channel ; ADC1: ADC Input Channel 1; PWM4: Timer4 PWM Output; UART1RXC: Uart0 Data In(C);
32	PA0	I/O	/		SDPG: SD Power Supply ALNK_DAT0_A: Audio Link Data0_A; ALNK_DAT0_B: Audio Link Data0_B; ADC0: ADC Input Channel 0; CLKOUT0 UART1TXC: Uart1 Data Output(C);

Confidential

The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

2、Electrical Characteristics

2.1 Absolute Maximum Ratings

Table 2-1

Symbol	Parameter	Min	Max	Unit
Tamb	Ambient Temperature	-40	+85	°C
Tstg	Storage temperature	-65	+150	°C
VBAT	Supply Voltage	-0.3	5.5	V
V _{3.3IO}	3.3V IO Input Voltage	-0.3	VDDIO+0.3	V
LDO_IN	Charge Input Voltage	-0.3	5.5	V

2.2 PMU Characteristics

Table 2-2

Symbol	Parameter	Min	Typ	Max	Unit	Test Conditions
LDO_IN	Loading current	-	-	300	mA	VBAT = 4.2V
VBAT	Voltage Input	2.2	3.7	5.5	V	
V _{VDDIO}	Voltage output	-	3.3	-	V	VBAT = 4.2V, 100mA loading
V _{BT_AVDD}	Voltage output	-	1.3	-	V	VBAT=4.2V, 100mA loading

2.3 Battery Charge

Table 2-3

Symbol	Parameter	Min	Typ	Max	Unit	Test Conditions
LDO_IN	Charge Input Voltage	4.5	5	5.5	V	-
V _{Charge}	Charge Voltage	4.15	4.2	4.25	V	-
I _{Charge}	Charge Current	20		300	mA	Charge current at fast charge mode
I _{Trickl}	Trickle Charge Current	20	45	70	mA	V _{BAT} <V _{Trickl}

Confidential

The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

2.4 IO Input/Output Electrical Logical Characteristics

Table 2-4

IO input characteristics						
Symbol	Parameter	Min	Typ	Max	Unit	Test Conditions
V_{IL}	Low-Level Input Voltage	-0.3	–	$0.3 * V_{DDIO}$	V	$V_{DDIO} = 3.3V$
V_{IH}	High-Level Input Voltage	$0.7 * V_{DDIO}$	–	$V_{DDIO} + 0.3$	V	$V_{DDIO} = 3.3V$
IO output characteristics						
V_{OL}	Low-Level Output Voltage	–	–	0.33	V	$V_{DDIO} = 3.3V$
V_{OH}	High-Level Output Voltage	2.7	–	–	V	$V_{DDIO} = 3.3V$

2.5 Internal Resistor Characteristics

Table 2-5

Port	General Output	High Drive	Internal Pull-Up Resistor	Internal Pull-Down Resistor	Comment
PA2~PA6 PB1,PB4 PB6,PB7 PC2~PC5	8mA	24mA	10K	10K	1、PB1 default pull up 2、USBDM & USBDP default pull down 3、internal pull-up/pull-down resistance accuracy $\pm 20\%$
PA0 PB3	Output 0	8mA	10K	10K	
	Output 1	8mA			
PB0, PB2, PB5	8mA	–	10K	10K	
USB DP	4mA	–	1.5K	15K	
USB DM	4mA	–	180K	15K	

2.6 DAC Characteristics

Table 2-6

Parameter	Min	Typ	Max	Unit	Test Conditions
Frequency Response	20	–	20K	Hz	1KHz/0dB 10Kohm loading With A-Weighted Filter
THD+N	–	-75	–	dB	
S/N	–	95	–	dB	
Crosstalk	–	-90	–	dB	
Output Swing	–	1	–	Vrms	
Dynamic Range	–	95	–	dB	1KHz/-60dB 10Kohm loading With A-Weighted Filter
DAC Output Power	–	20	–	mW	16ohm loading

Confidential

The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

2.7 ADC Characteristics

Table 2-7

Parameter	Min	Typ	Max	Unit	Test Conditions
Dynamic Range		80		dB	Fsample=44.1kHz Fin=1KHz 2mVpp Input
S/N	-	90	91	dB	Fsample=44.1kHz Fin=1KHz 1.2Vpp Input
THD+N	-	-70	-	dB	
Crosstalk	-	-90	-	dB	

2.8 BT Characteristics

2.8.1 Transmitter

Basic Data Rate

Table 2-8

Parameter	Min	Typ	Max	Unit	Test Conditions
RF Transmit Power		4	6	dBm	25°C, Power Supply VBAT=4.2V 2441MHz
RF Power Control Range		20		dB	
20dB Bandwidth		950		KHz	
Adjacent Channel	+2MHz	-40		dBm	
	-2MHz	-38		dBm	
Transmit Power	+3MHz	-44		dBm	
	-3MHz	-35		dBm	

Enhanced Data Rate

Table 2-9

Parameter	Min	Typ	Max	Unit	Test Conditions
Relative Power		-1		dB	25°C, Power Supply VBAT=4.2V 2441MHz
$\pi/4$ DQPSK Modulation Accuracy	DEVM RMS	6		%	
	DEVM 99%	10		%	
	DEVM Peak	15		%	
Adjacent Channel	+2MHz	-40		dBm	
	-2MHz	-38		dBm	
Transmit Power	+3MHz	-44		dBm	
	-3MHz	-35		dBm	

Confidential

The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

2.7.2 Receiver

Basic Data Rate

Table 2-10

Parameter		Min	Typ	Max	Unit	Test Conditions
Sensitivity			-90		dBm	25°C, Power Supply VBAT=4.2V 2441MHz
Co-channel Interference Rejection			-13		dB	
Adjacent Channel	+1MHz		+5		dB	
	-1MHz		+2		dB	
	+2MHz		+37		dB	
Interference Rejection	-2MHz		+36		dB	
	+3MHz		+40		dB	
	-3MHz		+35		dB	

Enhanced Data Rate

Table 2-11

Parameter		Min	Typ	Max	Unit	Test Conditions
Sensitivity			-90		dBm	25°C, Power Supply VBAT=4.2V 2441MHz
Co-channel Interference Rejection			-13		dB	
Adjacent Channel	+1MHz		+5		dB	
	-1MHz		+2		dB	
	+2MHz		+37		dB	
Interference Rejection	-2MHz		+36		dB	
	+3MHz		+40		dB	
	-3MHz		+35		dB	

2.9 FM Receiver Characteristics

Table 2-12

Parameter	Min	Typ	Max	Unit	Test Conditions
Input Frequency	76		108	MHz	
Usable Sensitivity	3	4	8	dB μ V EMF	(S+N)/N=26dB
Adjacent Channel Selectivity		48		dB	\pm 200kHz
IIP3		88		dB μ V EMF	Δ f1=200 kHz, Δ f2=400 kHz
Audio Output Voltage	0		3	V	Empty Load
Audio Frequency Response	20		20k	Hz	DacTest
Audio (S+N)/N		58		dB	
Stereo Separation		40		dB	
Audio Total Harmonic Distortion (THD)		0.4		%	

Confidential

The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

3、 Package Information

3.1 QFN32(4mm*4mm)

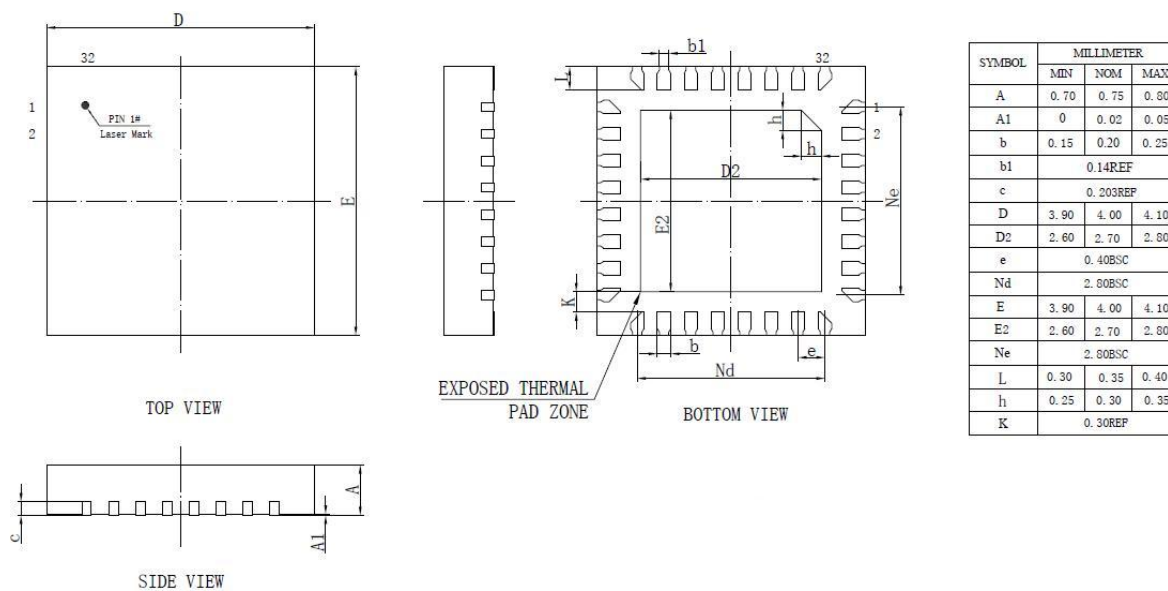


Figure 3-1. AC6966B_QFN32 Package

4、 Revision History

Date	Revision	Description
2020.06.01	V1.0	Initial Release
2021.11.22	V1.1	Update Bluetooth Vision and profiles, Update Audio characters
2021.12.23	V1.2	Update package size
2023.12.11	V1.3	Update Bluetooth Vision and profiles
2025.01.09	V1.4	Update Bluetooth Vision and profiles
2026.03.21	V1.5	Update PMU Characteristics
2026.04.03	V1.6	Update Pin Description and PMU Characteristics

Confidential

The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.