

# **AC7106A Datasheet**

**Zhuhai Jieli Technology Co.,LTD**

**Version V1.5**

**Date 2025.09.11**

**Copyright © Zhuhai Jieli Technology Co.,LTD. All rights reserved.**

## Revision History

Date	Revision	Description
2025.01.15	V1.0	Initial Release
2025.03.14	V1.1	Update IC Marking Information
2025.04.15	V1.2	Update Datasheet Format Update Feature_Applications Update DAC Characteristics Update Package Information
2025.06.13	V1.3	Update Features_SYSTEM Update Features_Audio Update Audio DAC Characteristics
2025.08.29	V1.4	Update Features_Audio Update Pin Description(the differences in I/O Functions among different versions of chips)
2025.09.11	V1.5	Update Pin Description

# Table of Contents

<b>Revision History</b> .....	<b>1</b>
<b>Table of Contents</b> .....	<b>2</b>
<b>AC7106A Features</b> .....	<b>3</b>
<b>1 Block Diagram</b> .....	<b>5</b>
<b>2 Pin Definition</b> .....	<b>6</b>
2.1 Pin Assignment .....	6
2.2 Pin Description .....	7
2.3 Pin Specialist .....	8
<b>3 Electrical Characteristics</b> .....	<b>9</b>
3.1 Absolute Maximum Ratings .....	9
3.2 ESD Ratings .....	9
3.3 PMU Characteristics .....	9
3.4 Battery Charge .....	10
3.5 IO Characteristics .....	10
3.6 Audio DAC Characteristics .....	12
3.7 Audio ADC Characteristics .....	18
3.8 BT Characteristics .....	19
<b>4 Package Information</b> .....	<b>20</b>
4.1 QFN32_4×4mm .....	20
<b>5 IC Marking Information</b> .....	<b>21</b>
<b>6 Solder-Reflow Condition</b> .....	<b>22</b>

# AC7106A Features

## SYSTEM

- 32bit Single-core DSP 192MHz
- On-chip SRAM 240kbyte
- With IEEE754 Single precision FPU
- Support FFT/MATRIX/MATH
- I-cache and D-cache
- Support EMU
- Support MMU
- Support MPU
- Built-In Flash
- 24MHz crystal oscillator
- Internal RC oscillator,PLL

## DSP Audio Processing

- SBC/AAC/LDAC/LHDC/LC3/CVSD/mSBC codec
- mSBC voice codec supported for BT phone
- PLC for voice processing
- Single/Dual MIC ENC
- Multi-band DRC
- Multi-band EQ
- Support spatial sound
- Support assistive listening
- Support Hi-Res Audio

## ANC

- Wide band digital adaptive ANC
- Support hybrid/feedforward/feedback
- Support wind noise detection
- Support wide area tap
- Support Speak-to-Chat
- Support tip fit test & wear detection
- Input-to-output latency
  - ❖ 10us@SR=750kHz
  - ❖ 14us@SR=375kHz

## Audio

- 2 x 24bit DAC
  - ❖ SNR 119dB
  - ❖ Noise 1uVrms
  - ❖ Support differential mode
  - ❖ Support VCMO mode

- ❖ Sampling rate 8~384kHz
- 2 x 24bit ADC
  - ❖ SNR 100dB
  - ❖ Sampling rate 8~192kHz
  - ❖ Support analog/digital microphone
- 1 x I<sup>2</sup>S AUDIO Master/Slave interface
  - ❖ Sampling rate 8~384kHz
  - ❖ Support TX and RX
  - ❖ Support multi-slot mode(TDM)

## Bluetooth

- Dual-mode BT6.0 with LE Audio (DN Q332415)
- Support AoA
- Support LE audio BIS/CIS
- Maximum transmitting power 13dBm
- Receiver sensitivity
  - ❖ -94dBm @BR
  - ❖ -95dBm @EDR Π/4 DQPSK
  - ❖ -87dBm @EDR 8DPSK

## Peripherals

- 1 x Full speed USB
- 1 x SD host controller
- 4 x Multi-function 32bit timer
- 2 x UART interface
- 1 x I<sup>2</sup>C Master/Slave interface
- 2 x SPI Master/Slave interface
- 1 x QDEC
- 1 x 10bit ADC(9 Channels)
- 4 x MCPWM
- 3 x LP\_Touch with low power wake up
- 4 x IR RX
- 14 x GPIO Support function remapping

## PMU

- Integrated battery charger up to 225mA
- 1 x Buck DC-DC converter
- Support temperature sensor
- Support VBAT input current OCP
- VPWR range 4.5V to 5.5V

- VBAT range 2.7V to 4.5V
- IOVDD range 2.7V to 3.6V
- TWS Power < 4.4mA  
@AAC No-Load VBAT=3.7V

#### Packages

- QFN32(4mm\*4mm)


#### Temperature

- Operating temperature  
TC = -20°C to +85°C(standard range)  
TC = -40°C to +105°C(extended range)
- Storage temperature -65°C to +150°C

#### Applications

- ANC TWS/OWS
- Bluetooth audio device
- Wireless microphone

# 1 Block Diagram

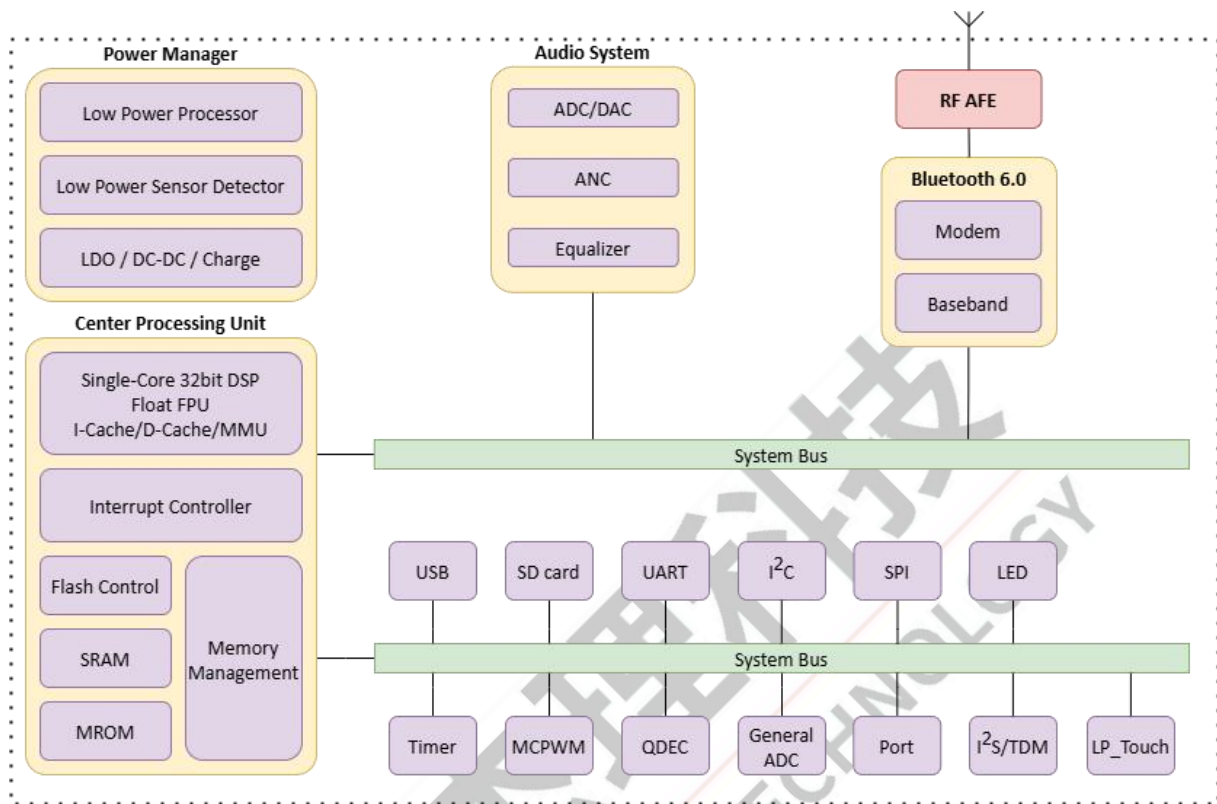

**Figure 1-1 AC7106A Block Diagram**

## 2 Pin Definition

### 2.1 Pin Assignment

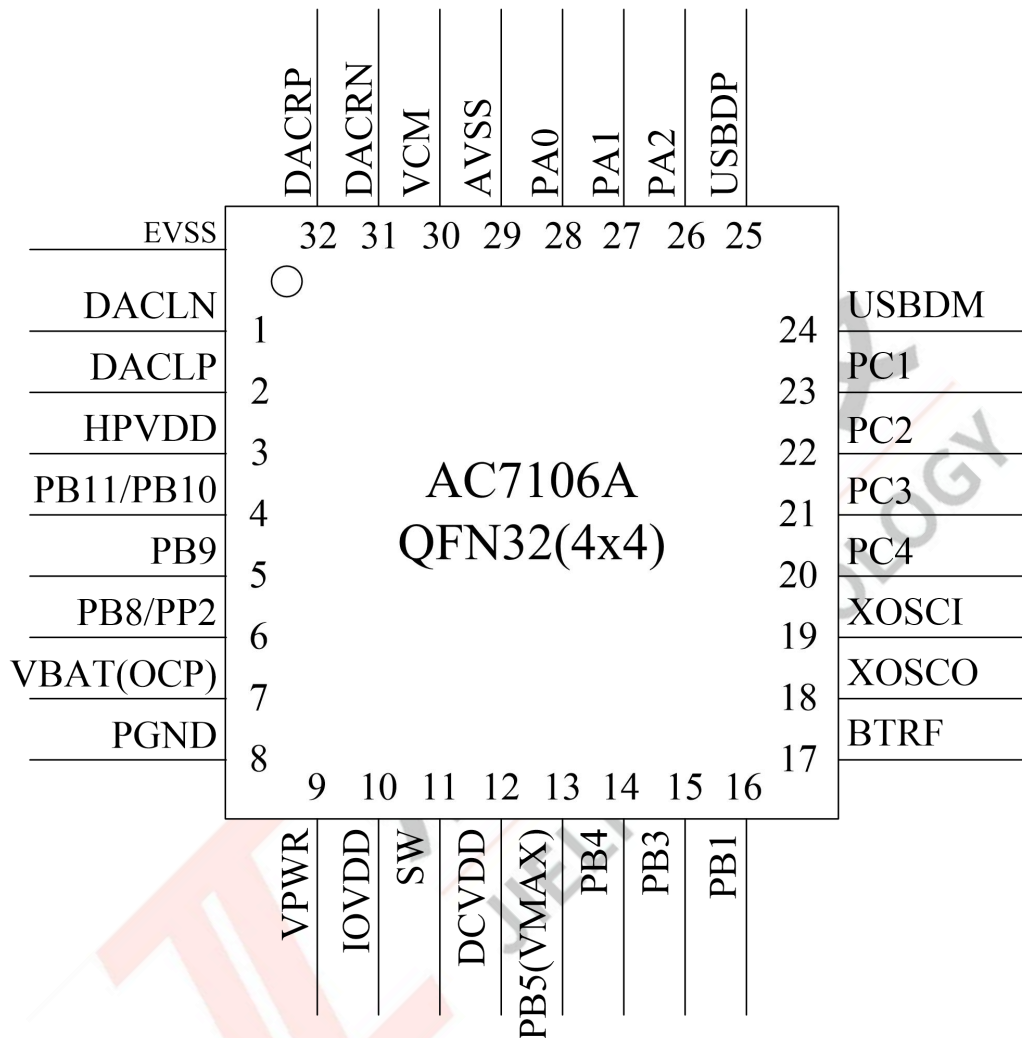


Figure 2-1 AC7106A Pin Assignment

## 2.2 Pin Description

**Table 2-2-1 AC7106A Pin Description**

Pin No.	Name	Type	IO Initial State	Description
1	DACLN	P	--	Left Channel DAC Negative Output DAC VCMO Output
2	DACLP	P	--	Left Channel DAC Positive Output
3	HPVDD	P	--	Audio Power
4	PB11	I/O	Z	MICBIASB(MIC Bias Output) MIC_B0(MIC Input)
	PB10	I/O	Z	AIN_B0(Audio ADC Positive Input)
5	PB9*	I/O	Z	<b>Chip Version A/B/C :</b> AIN_B1(Audio ADC Positive Input) AIN_BN(Audio ADC Negative Input)
				<b>Chip Version D :</b> AIN_BN(Audio ADC Negative Input)
6	PB8*	I/O	Z	<b>Chip Version A/B/C :</b> ADC12(ADC Input Channel 12)
				<b>Chip Version D :</b> AIN_B1(Audio ADC Positive Input) ADC12(ADC Input Channel 12)
	PP2	I/O	Z	SDPG(SD Power) ADC13(ADC Input Channel 13)
7	VBAT(OCP)	P	--	Battery Input OCP(Over current protection)
8	PGND	G	--	Ground of Buck DC-DC converter
9	VPWR	P	--	Charge Power Input
10	IOVDD	P	--	IO Power
11	SW	P	--	Buck DCDC Switch Port
12	DCVDD	P	--	1.25V DCDC Power
13	PB5(VMAX)	I/O	VMAX	--
14	PB4	I/O	10kΩ Pull-up	Hold down 0 to reset LP_TOUCH5(TOUCH_CH5) ADCP0(ADC Input Channel P0)
15	PB3	I/O	Z	LP_TOUCH4(TOUCH_CH4) ADC10(ADC Input Channel 10)
16	PB1	I/O	Z	LP_TOUCH2(TOUCH_CH2) ADC8(ADC Input Channel 8)
17	BTRF	RF	--	Bluetooth RF Antenna
18	XOSCO	O	--	Crystal Oscillator Output
19	XOSCI	I	--	Crystal Oscillator Input

Pin No.	Name	Type	IO Initial State	Description
20	PC4	I/O	Z	ADC3(ADC Input Channel 3)
21	PC3	I/O	Z	ADC2(ADC Input Channel 2)
22	PC2	I/O	Z	ADC1(ADC Input Channel 1)
23	PC1	I/O	Z	ADC0(ADC Input Channel 0)
24	USBDM	I/O	15kΩ Pull-down	USB Negative Data ADC15(ADC Input Channel 15)
25	USBDP	I/O	15kΩ Pull-down	USB Positive Data ADC14(ADC Input Channel 14)
26	PA2*	I/O	Z	<b>Chip Version A/B/C :</b> AIN_A1(Audio ADC Positive Input) AIN_AN(Audio ADC Negative Input)
				<b>Chip Version D :</b> AIN_AN(Audio ADC Negative Input)
27	PA1	I/O	Z	AIN_A0(Audio ADC Positive Input)
28	PA0	I/O	Z	MICBIASA(MIC Bias Output) MIC_A0(MIC Input)
29	AVSS	G	--	Audio Ground
30	VCM	P	--	Audio reference voltage
31	DACRN	P	--	Right Channel DAC Negative Output
32	DACRP	P	--	Right Channel DAC Positive Output

**Note**

- 1.IO initial state abbreviations Z--High resistance, H--High level, L--Low level, X--May be changed during power on.
- 2.Timer, SPDIF, MCPWM, QDEC, UART, LEDC, I<sup>2</sup>C, I<sup>2</sup>S, SPI,IR RX and SD functions can be remapped to any I/O.
- 3.\* indicates that this pin function is related to the chip version.

**Table 2-2-2 Pin Types Description**

Pin Type	Description	Pin Type	Description
P	Power	I/O	Input or Output
G	Ground	I	Input
RF	RF antenna	O	Output

## 2.3 Pin Specialist

**Table 2-3 Pin keep Description**

Pin	Description for IOVDD power off mode
VMAX	Output max voltage from VBAT and VPWR in IO Initial State
PC1	Support driving and sampling external 100kΩ NTC resistance in single IO
PB4	10kΩ Pull-up and Hold down 0 to reset function can be disable by efuse in IO Initial State

### 3 Electrical Characteristics

#### 3.1 Absolute Maximum Ratings

**Table 3-1 Absolute Maximum Ratings**

Symbol	Parameter	Min	Max	Unit
Topt	Operating temperature	-20	+85	°C
Tstg	Storage temperature	-65	+150	°C
VBAT	Supply Voltage	-0.3	4.5	V
VPWR		-0.3	6	V
IOVDD		-0.3	3.6	V
HPVDD		-0.3	3.6	V
DCVDD		-0.3	1.55	V
GPIO	Input voltage of GPIO	-0.3	3.6	V

**Note**

1. Stresses beyond those listed under absolute maximum ratings may cause permanent damage to the device.

#### 3.2 ESD Ratings

**Table 3-2 ESD Ratings**

Parameter	Typ	Test pin	Reference standard
Human Body Mode	±4kV	All pins	JEDEC EIA/JESD22-A114
Machine Mode	±300V	All pins	JEDEC EIA/JESD22-A115
Charge Device Model	±2kV	All pins	ANSI/ESDA/JEDEC JS-002-2022

#### 3.3 PMU Characteristics

**Table 3-3 PMU Characteristics**

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
VBAT	Power supply	--	2.7	3.7	4.5	V
VPWR	Power supply	--	4.5	5.0	5.5	V
<b>Operating mode</b>						
Symbol	Parameter	Conditions	Min	Typ	Max	Unit
IOVDD	Voltage output	--	--	3	--	V
	Loading current	IOVDD=3.0V@VBAT = 3.7V or VPWR=5V	--	--	120	mA
DCVDD	Voltage output	--	--	1.25	--	V
	Loading current	DCVDD=1.25V@IOVDD=3.0V in LDO mode	--	--	120	mA
		DCVDD=1.25V@VBAT=3.7V in DCDC mode	--	--	120	mA

Low Power mode						
Symbol	Parameter	Conditions	Min	Typ	Max	Unit
IOVDD	Loading current	IOVDD=3.0V@VBAT = 3.7V or VPWR=5V	--	--	10	mA

### 3.4 Battery Charge

**Table 3-4 Charger Characteristics**

Symbol	Parameter	Min	Typ	Max	Unit
VPWR	Charge Input Voltage	4.5	5	5.5	V
CV	CV Mode Voltage Accuracy	4.175	4.2	4.225	V
		4.375	4.4	4.425	V
		4.475	4.5	4.525	V
CC	CC Mode Current	30	--	225	mA
$I_{end}$	End Of Charge Current	3	--	22.5	mA
$V_{Trikl}$	Trickle Charge Voltage	--	3	--	V

### 3.5 IO Characteristics

**Table 3-5 IO Characteristics**

Input Characteristics						
Symbol	Parameter	Conditions	IO	Min	Max	Unit
$V_{IL}$	Low-Level Input Voltage	IOVDD = 3.0V	PA0~PA2 PB1,PB3,PB4,PB8~PB11 PC1~PC4 PP2 VPWR USBDP USBDM	-0.3	1.3	V
$V_{IH}$	High-Level Input Voltage	IOVDD = 3.0V	PA0~PA2 PB1,PB3,PB4,PB8~PB11 PC1~PC4 PP2 USBDP USBDM	1.7	3.3	V
		IOVDD = 3.0V	VPWR	1.7	5.5	V
Output Characteristics						
Symbol	Parameter	Conditions	IO	Typ	Unit	
$ I_{OL} $	Output Current	IOVDD = 3.0V Voutput = 0.3V	PA0~PA2 PB1,PB3,PB4,PB8~PB11 PC1~PC4	1(HD=0) 4(HD=1) 8(HD=2) 31(HD=3)	mA	
		IOVDD = 3.0V	USBDP	8	mA	

		Voutput = 0.3V	USBDM		
		IOVDD = 3.0V Voutput = 0.3V	PP2	30(HD=0) 300(HD=1)	mA
		IOVDD = 3.0V Voutput = 0.3V	VPWR	2	mA
I <sub>OH</sub>	Output Current	IOVDD = 3.0V Voutput = 2.7V	PA0~PA2 PB1,PB3,PB4,PB8~PB11 PC1~PC4	1(HD=0) 4(HD=1) 8(HD=2) 31(HD=3)	mA
		IOVDD = 3.0V Voutput = 2.7V	USBDP USBDM	8	mA
		IOVDD = 3.0V Voutput = 2.7V	PP2	30(HD=0) 300(HD=1)	mA
		IOVDD = 3.0V Voutput = 2.7V	VPWR	2	mA
<b>Internal Resistance Characteristics</b>					
Symbol	Parameter	Conditions	IO	Typ	Unit
R <sub>pu</sub>	Pull-up Resistance	IOVDD = 3.0V	PA0~PA2 PB1,PB3,PB4,PB8~PB11 PC1~PC4 PP2 VPWR	10k(PU=1) 200k(PU=2) 1M(PU=3)	Ω
		IOVDD = 3.0V	USBDP	1.5k 10k(PU=1) 200k(PU=2) 1M(PU=3)	Ω
		IOVDD = 3.0V	USBDM	180k 10k(PU=1) 200k(PU=2) 1M(PU=3)	Ω
R <sub>pd</sub>	Pull-down Resistance	IOVDD = 3.0V	PA0~PA2 PB1,PB3,PB4,PB8~PB11 PC1~PC4 PP2 VPWR	10k(PD=1) 200k(PD=2) 1M(PD=3)	Ω
		IOVDD = 3.0V	USBDP USBDM	15k 10k(PU=1) 200k(PU=2) 1M(PU=3)	Ω

**Note**

1. Internal pull-up/pull-down resistance accuracy ±20%

### 3.6 Audio DAC Characteristics

**Table 3-6-1 Stereo DAC Characteristics (HPVDD Under 1.25V)**

Parameter	Conditions	Min	Typ	Max	Unit	
Resolution	--	--	24	--	bits	
Input Sample Rate	--	8	--	384	kHz	
SNR <sup>①</sup>	Differential Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=1.25V Load=16Ω	--	116	--	dB
	VCMO Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=1.25V Load=16Ω	--	110	--	dB
Dynamic Range	Differential Mode Fin=1kHz@-60dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=1.25V Load=16Ω	--	105	--	dB
	VCMO Mode Fin=1kHz@-60dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=1.25V Load=16Ω	--	97	--	dB
THD+N	Differential Mode Fin=1kHz@-0.5dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=1.25V Load=32Ω	--	-80	--	dB
	VCMO Mode Fin=1kHz@-0.5dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=1.25V Load=32Ω	--	-65	--	dB
Noise Floor	Differential Mode Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=1.25V Load=16Ω	--	4.5	--	uVrms
	VCMO Mode Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=1.25V Load=16Ω	--	4.5	--	uVrms
Noise Floor with MUTE	Differential Mode Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=1.25V Load=16Ω	--	1	--	uVrms
	VCMO Mode Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=1.25V Load=16Ω	--	1	--	uVrms

Stereo Crosstalk	Differential Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=1.25V Load=10kΩ	--	-120	--	dB
	VCMO Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=1.25V Load=10kΩ	--	-100	--	dB
Max Output Power	Differential Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted THD+N<0.1%	HPVDD=1.25V Load=16Ω	--	30	--	mW
	VCMO Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted THD+N<0.1%	HPVDD=1.25V Load=16Ω	--	7	--	mW

**Table 3-6-2 Stereo DAC Characteristics (HPVDD Under 1.55V)**

Parameter	Conditions	Min	Typ	Max	Unit	
Resolution	--	--	24	--	bits	
Input Sample Rate	--	8	--	384	kHz	
SNR <sup>①</sup>	Differential Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=1.55V Load=16Ω	--	119	--	dB
	VCMO Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=1.55V Load=16Ω	--	113	--	dB
Dynamic Range	Differential Mode Fin=1kHz@-60dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=1.55V Load=16Ω	--	107	--	dB
	VCMO Mode Fin=1kHz@-60dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=1.55V Load=16Ω	--	99	--	dB
THD+N	Differential Mode Fin=1kHz@-0.5dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=1.55V Load=32Ω	--	-80	--	dB

	VCMO Mode Fin=1kHz@-0.5dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=1.55V Load=32Ω	--	-60	--	dB
Noise Floor	Differential Mode Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=1.55V Load=16Ω	--	4.5	--	uVrms
	VCMO Mode Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=1.55V Load=16Ω	--	4.5	--	uVrms
Noise Floor with MUTE	Differential Mode Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=1.55V Load=16Ω	--	1	--	uVrms
	VCMO Mode Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=1.55V Load=16Ω	--	1	--	uVrms
Stereo Crosstalk	Differential Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=1.55V Load=10kΩ	--	-120	--	dB
	VCMO Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=1.55V Load=10kΩ	--	-100	--	dB
Max Output Power	Differential Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted THD+N<0.1%	HPVDD=1.55V Load=16Ω	--	50	--	mW
	VCMO Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted THD+N<0.1%	HPVDD=1.55V Load=16Ω	--	11.7	--	mW

**Table 3-6-3 Stereo DAC Characteristics (HPVDD Under 2.1V)**

Parameter	Conditions	Min	Typ	Max	Unit	
Resolution	--	--	24	--	bits	
Input Sample Rate	--	8	--	384	kHz	
SNR <sup>①</sup>	Differential Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=2.1V Load=16Ω	--	121	--	dB

	VCMO Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=2.1V Load=16Ω	--	115	--	dB
Dynamic Range	Differential Mode Fin=1kHz@-60dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=2.1V Load=16Ω	--	109	--	dB
	VCMO Mode Fin=1kHz@-60dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=2.1V Load=16Ω	--	100	--	dB
THD+N	Differential Mode Fin=1kHz@-0.5dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=2.1V Load=32Ω	--	-75	--	dB
	VCMO Mode Fin=1kHz@-0.5dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=2.1V Load=32Ω	--	-60	--	dB
Noise Floor	Differential Mode Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=2.1V Load=16Ω	--	4.5	--	uVrms
	VCMO Mode Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=2.1V Load=16Ω	--	4.5	--	uVrms
Noise Floor with MUTE	Differential Mode Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=2.1V Load=16Ω	--	1	--	uVrms
	VCMO Mode Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=2.1V Load=16Ω	--	1	--	uVrms
Stereo Crosstalk	Differential Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=2.1V Load=10kΩ	--	-120	--	dB
	VCMO Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=2.1V Load=10kΩ	--	-100	--	dB
Max Output Power	Differential Mode Fin=1kHz@0dBFS Fs=44.1kHz	HPVDD=2.1V Load=16Ω	--	80	--	mW

	B/W=20Hz~20kHz A-Weighted THD+N<0.1%					
	VCMO Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted THD+N<0.1%	HPVDD=2.1V Load=16Ω	--	20	--	mW

**Table 3-6-4 Stereo DAC Characteristics (HPVDD Under 3.0V)**

Parameter	Conditions	Min	Typ	Max	Unit	
Resolution	--	--	24	--	bits	
Input Sample Rate	--	8	--	384	kHz	
SNR <sup>①</sup>	Differential Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=3.0V Load=16Ω	--	122	--	dB
	VCMO Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=3.0V Load=16Ω	--	116	--	dB
Dynamic Range	Differential Mode Fin=1kHz@-60dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=3.0V Load=16Ω	--	109	--	dB
	VCMO Mode Fin=1kHz@-60dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=3.0V Load=16Ω	--	103	--	dB
THD+N	Differential Mode Fin=1kHz@-0.5dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=3.0V Load=32Ω	--	-80	--	dB
	VCMO Mode Fin=1kHz@-0.5dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=3.0V Load=32Ω	--	-58	--	dB
Noise Floor	Differential Mode Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=3.0V Load=16Ω	--	4.5	--	uVrms
	VCMO Mode Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=3.0V Load=16Ω	--	4.5	--	uVrms

Noise Floor with MUTE	Differential Mode Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=3.0V Load=16Ω	--	1	--	uVrms
	VCMO Mode Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=3.0V Load=16Ω	--	1	--	uVrms
Stereo Crosstalk	Differential Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=3.0V Load=10kΩ	--	-120	--	dB
	VCMO Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	HPVDD=3.0V Load=10kΩ	--	-100	--	dB
Max Output Power	Differential Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted THD+N<0.1%	HPVDD=3.0V Load=16Ω	--	100	--	mW
	VCMO Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted THD+N<0.1%	HPVDD=3.0V Load=16Ω	--	25	--	mW

**Note**

- ① SNR is the ratio of output level with a 1kHz full-scale input to output level with MUTE on.

### 3.7 Audio ADC Characteristics

**Table 3-7 Audio ADC Characteristics**

Parameter	Conditions	Min	Typ	Max	Unit
Resolution	--	--	24	--	bits
Output Sample Rate	--	8	--	192	kHz
SNR	Differential input Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted ADC gain=0dB	--	100	--	dB
	Single-ended input Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted ADC gain=0dB	--	99	--	dB
Dynamic Range	Differential input Mode Fin=1kHz@-60dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted ADC gain=0dB	--	100	--	dB
	Single-ended input Mode Fin=1kHz@-60dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted ADC gain=0dB	--	99	--	dB
THD+N	Differential input Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted ADC gain=0dB	--	-90	--	dB
	Single-ended input Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted ADC gain=0dB	--	-88	--	dB
Analogue Gain	--	-6	--	27	dB
Max Input Level	Differential input Mode ADC gain=0dB	--	0.56	--	Vrms
	Single-ended input Mode ADC gain=0dB	--	0.28	--	Vrms

### 3.8 BT Characteristics

#### 3.8.1 Transmitter

**Table 3-8-1 Transmitter characteristics**

Parameter	Conditions	Min	Typ	Max	Unit
Maximum RF Transmit Power	BR	--	10	13	dBm
Maximum RF Transmit Power	EDR $\pi/4$ DQPSK EDR 8DPSK	--	10	--	dBm
Relative Transmit Power	EDR $\pi/4$ DQPSK EDR 8DPSK	--	1	--	dB
Maximum RF Transmit Power	BLE-1Mbps	--	10	--	dBm
$1\sigma$ of Maximum RF Transmit Power distribution	BR/EDR/BLE	--	2	--	dB


#### 3.8.2 Receiver

**Table 3-8-2 Receiver characteristics**

Parameter	Conditions	Min	Typ	Max	Unit
Sensitivity	BR	--	-94	--	dBm
	EDR $\pi/4$ DQPSK	--	-95	--	dBm
	EDR 8DPSK	--	-87	--	dBm
	BLE-1Mbps	--	-97	--	dBm
	BLE-2Mbps	--	-93	--	dBm
$1\sigma$ of sensitivity distribution	BR/EDR/BLE	--	2	--	dB

## 4 Package Information

### 4.1 QFN32\_4×4mm

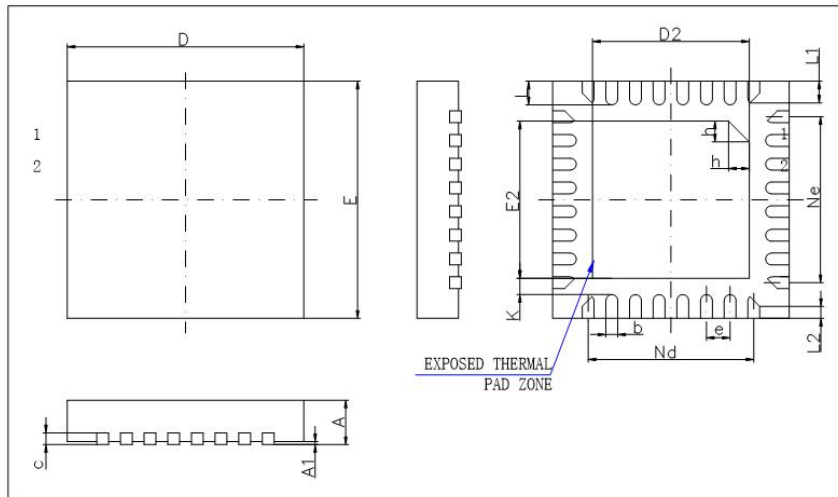

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	0.65	0.80	0.95
A1	0	0.02	0.05
b	0.15	0.20	0.25
c	0.18	0.20	0.25
D	3.90	4.00	4.10
D2	2.50	2.65	2.80
e	0.40BSC		
Nd	2.80BSC		
E	3.90	4.00	4.10
E2	2.50	2.65	2.80
Ne	2.80BSC		
K	0.20	-	-
L	0.35	0.40	0.45
L1	0.30	0.35	0.40
L2	0.15	0.20	0.25
h	0.30	0.35	0.40
L/F 数据尺寸 (mil)	112*112		

Figure 4-1 AC7106A Package

## 5 IC Marking Information

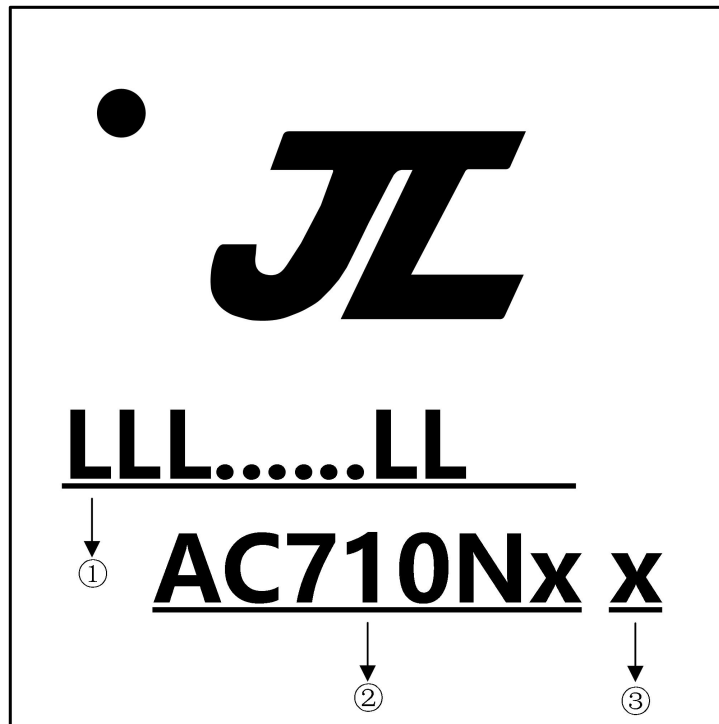


Figure 5-1 AC7106A Package Outline

- ① LLL.....LL Production Batch
- ② AC710Nx Chip Model
- ③ x Built-in flash size
  - 4 4Mbit Flash
  - 8 8Mbit Flash
  - 6 16Mbit Flash

## 6 Solder-Reflow Condition

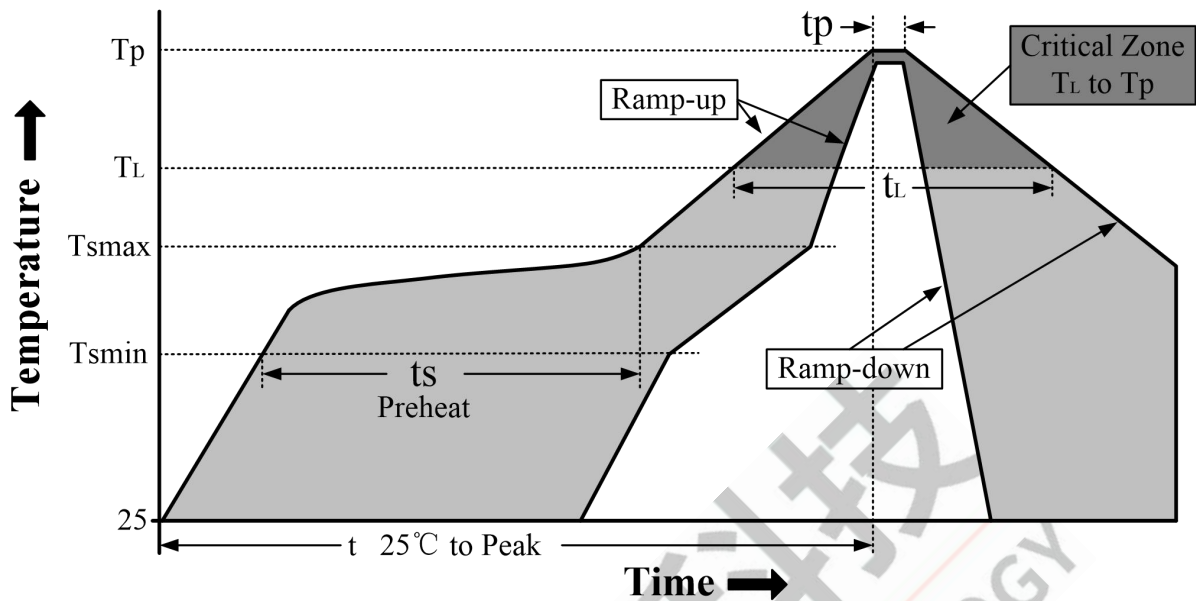


Figure 6-1 Classification Reflow Profile

Table 6-1 Classification Profiles

Profile Feature		Sn-Pb Eutectic Assembly	Pb-Free Assembly
Preheat/Soak	Temperature Min ( $T_{smin}$ )	100°C	150°C
	Temperature Max ( $T_{smax}$ )	150°C	200°C
	Time ( $t_s$ ) from ( $T_{smin}$ to $T_{smax}$ )	60-120 seconds	60-180 seconds
Average ramp-up rate ( $T_{smax}$ to $T_p$ )		3°C/second max	3°C/second max
Liquidous temperature ( $T_L$ )		183°C	217°C
Time ( $t_L$ ) maintained above $T_L$		60-150 seconds	60-150 seconds
Peak package body temperature ( $T_p$ )		See Table 6-2	See Table 6-3
Time within 5°C of actual Peak Temperature ( $t_p$ ) <sup>2</sup>		10-30 seconds	20-40 seconds
Ramp-down rate ( $T_p$ to $T_L$ )		6°C/second max	6°C/second max
Time 25°C to peak temperature		6 minutes max	8 minutes max

**Note**

- 1.All temperatures refer to topside of the package, measured on the package body surface
- 2.Time within 5°C of actual peak temperature ( $t_p$ ) specified for the reflow profiles is a “supplier” and “user” maximum.

Table 6-2 SnPb Classification Temperature

Package Thickness	Volume mm <sup>3</sup>	Volume mm <sup>3</sup>
	< 350	≥ 350
<2.5 mm	240 +0/-5°C	225 +0/-5°C
≥2.5 mm	225 +0/-5°C	225 +0/-5°C

**Table 6-3 Pb-free - Classification Temperature**

Package Thickness	Volume mm <sup>3</sup> < 350	Volume mm <sup>3</sup> 350 - 2000	Volume mm <sup>3</sup> > 2000
< 1.6mm	260°C	260°C	260°C
1.6 mm - 2.5mm	260°C	250°C	245°C
> 2.5mm	250°C	245°C	245°C

**Note**

1.\*Tolerance The device manufacturer/supplier shall assure process compatibility up to and including the stated classification temperature (this means Peak reflow temperature +0°C.For example 260°C+0°C)at the rated MSL level.