

# **AC6955H Datasheet**

**Zhuhai Jieli Technology Co.,LTD**

**Version: V1.6**

**Date: 2026.04.07**

**Copyright © Zhuhai Jieli Technology Co.,LTD. All rights reserved.**

---

# AC6955H Features

## CPU

- 32-bit DSP supports hardware Float Point Unit (FPU)
- Up to 240MHz programmable processor
- 64 Vectored interrupts
- 8 Levels interrupt priority

## DSP Audio Processing

- SBC, AAC Audio decodes supported for BT audio
- mSBC voice codecs supported for BT phone
- Supports MP2, MP3, WMA, APE, FLAC, AAC, MP4, M4A, WAV, AIF, AIFC audio decoding
- Packet Loss Concealment (PLC) for voice processing
- Acoustic echo cancellation/suppression (AEC, AES)
- Single/Dual MIC Environmental Noise Cancellation (ENC)
- Multi-band DRC limiter
- 30-band EQ configuration for voice Effects

## Audio Codec

- One channels 16-bit DAC, SNR >= 95dB
- Three channels 16-bit ADC, SNR >= 90dB
- Sampling rates of 8KHz/11.025KHz/16KHz/22.05KHz/24KHz/32KHz/44.1KHz/48KHz are supported
- One analog MIC amplifier, build-in MIC bias generator
- Supports two PDM digital MIC inputs
- Three channels Stereo analog MUX
- Single-ended mode at the DAC path
- Supports 16ohm and 32ohm Speaker loading

## Bluetooth

- Compliant with Bluetooth V6.0+BR+EDR+BLE specification (DN Q334307)
- Meet class2 and class3 transmitting power requirement

- Support GFSK and  $\pi/4$  DQPSK all packet types
- Provides maximum +6dBm transmitting power
- Receiver with minimum -90dBm sensitivity
- Fast AGC for enhanced dynamic range
- Supports a2dp\avctp\avdtp\avrcp\hfp\spp\smpt\att\gap\gatt\rfcomm\sdpl2cap profile
- a2dp 1.4\avctp 1.4\avdtp 1.3\avrcp 1.6.3\hfp 1.9\spp 1.2\rfcomm 1.2\pnp 1.3\hid 1.1.1\sdpcore 6.0\l2cap core 6.0

## Peripherals

- One full speed USB 2.0 OTG controller
- Four multi-function 16-bit timers, support capture and PWM mode
- Three 16-bit PWM generator for motor driving
- Three full-duplex basic UART, UART0 and UART1 supports DMA mode
- One SD Card Host controller
- One hardware IIC interface supports host and device mode
- Built-in Cap Sense Key controller
- 10-bit ADC for analog sampling
- External wake up/interrupt on all GPIOs

## PMU

- Low voltage LDO for internal digital and analog circuit supply
- 3uA current consumption in the soft-off mode
- Built-in LDO for the core, I/O, Bluetooth and flash
- VBAT is 2.2V to 5.5V
- VDDIO is 2.2V to 3.6V

## Packages

- QSOP24

## Temperature

## Confidential

The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

- Operating temperature: -40°C to +85°C
- Storage temperature: -65°C to +150°C

### Applications

- Bluetooth Sound Box



### Confidential

The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

# 1、 Pin Definition

## 1.1 Pin Assignment

USBDM	1	AC6955H (QSOP24)	24	BT OSCO
USBDP	2		23	BT OSCI
PA6	3		22	BT RF
PA5	4		21	PB1
PA1	5		20	PB2
PA0	6		19	PR0
PC7	7		18	PR1
MIC	8		17	VBAT
VDDIO	9		16	LDO_IN/PB5
VSSIO	10		15	PB8
VCOM	11		14	PB9
DACL	12		13	PB10

Figure 1-1 AC6955H Package Diagram

## 1.2 Pin Description

Table 1-1 AC6955H Pin Description

PIN NO.	Name	I/O Type	Drive (mA)	Function	Other Function
1	USBDM	I/O	4	USB Negative Data (pull down) *type1	UART1RXD: Uart1 Data In(D); IIC_SDA_A: IIC SDA(A);
2	USBDP	I/O	4	USB Positive Data (pull down) *type1	UART1TXD: Uart1 Data Out(D); IIC_SCL_A: IIC SCL(A); ADC12: ADC Input Channel 12;
3	PA6	I/O	24/8	GPIO	ADC2: ADC Input Channel 2; Wlan_Active: IIC_SDA_D: IIC SDA(D); Touch6: Touch Input Channel 6; UART0RXA: Uart0 Data In(A);
4	PA5	I/O	24/8	GPIO	ADC1: ADC Input Channel 1; BT_Active: IIC_SCL_D: IIC SCL(D); Touch5: Touch Input Channel 5; PWM0: Timer0 PWM Output; UART0TXA: Uart0 Data Out(A);
5	PA1	I/O	24/8	GPIO	AMUX0R: Analog Channel0 Right; Touch1: Touch Input Channel 1; ADC0: ADC Input Channel 0; UART1RXC: Uart1 Data In(C); PWMCH0L: Motor PWM Channel0(L);
6	PA0	I/O	24/8	GPIO	AMUX0L: Analog Channel0 Left; Touch0: Touch Input Channel 0; CLKOUT0: UART1TXC: Uart1 Data Out(C); PWMCH0H: Motor PWM Channel0(H);
7	PC7	I/O	/	GPIO	MIC_BIAS: Microphone Bias Output
8	MIC	I	/		MIC: MIC Input Channel
9	VDDIO	P	/		IO Power 3.3v
10	VSSIO	P	/		Ground
11	VCOM	P	/		DAC Reference
12	DACL	O	/		DAC Left Channel

### Confidential

The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

13	PB10	I/O	24/8	GPIO	AMUX2R: Analog Channel2 Right; SD0CMB: SD0 Command(B); ADC9: ADC Input Channel 9; UART2RXC: Uart2 Data In(C); PWMCH3L: Motor PWM Channel3(L);
14	PB9	I/O	24/8	GPIO	AMUX2L: Analog Channel2 Left; SD0CLKB: SD0CLKB; CAP0: Timer0 Capture; UART2TXC: Uart2 Data Out(C); PWMCH3H: Motor PWM Channel3(H);
15	PB8	I/O	24/8	GPIO	AMUX1R: Analog Channel1 Right; SD0DAT0B: SD0 Data0(B); ADC8: ADC Input Channel 8; CLKOUT1: Clk Out1;
16	LDO_IN	P	/	Charge Power 5v	
	PB5	I/O	8	GPIO (High Voltage Resistance) *type1	PWM3: Timer3 PWM Output; CAP1: Timer1 Capture; UART0TXC: Uart0 Data Out(C); UART0RXC: Uart0 Data In(C);
17	VBAT	P	/		Power Supply
18	PR1	I/O		RTCIO1 *type1	OSCO_32K
19	PR0	I/O		RTCIO0 *type1	OSCI_32K
20	PB2	I/O	8	GPIO (High Voltage Resistance)	PWMCH1L: Motor PWM Channel1 (L);
21	PB1	I/O	24/8	GPIO (pull up)	Long Press Reset; ADC5: ADC Input Channel 5; TMR2: Timer2 Clock Input; UART1RXA: Uart1 Data In(A);
22	BT_RF	/	/		BT Antenna
23	BT_OSCI	I	/		BT OSC In
24	BT_OSCO	O	/		BT OSC Out

Note:

\*type1: The GPIO is uncontrollable during the initial process

### Confidential

The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

## 2、Electrical Characteristics

### 2.1 Absolute Maximum Ratings

Table 2-1

Symbol	Parameter	Min	Max	Unit
Topt	Ambient Temperature	-40	+85	°C
Tstg	Storage temperature	-65	+150	°C
VBAT	Supply Voltage	-0.3	5.5	V
LDO_IN	Charger Voltage	-0.3	5.5	V
V <sub>3.3IO</sub>	3.3V IO Input Voltage	-0.3	VDDIO+0.3	V

### 2.2 PMU Characteristics

Table 2-2

Symbol	Parameter	Min	Typ	Max	Unit	Test Conditions
VBAT	Voltage Input	2.2	3.7	5.5	V	
LDO_IN	Charger Voltage	4.5	5.0	5.5	V	
V <sub>3.3</sub>	Voltage output	2.2	3.0	3.4	V	VBAT = 4.2V, 100mA loading
I <sub>L3.3</sub>	Loading current	—	—	150	mA	VBAT = 4.2V

### 2.3 Battery Charge

Table 2-3

Symbol	Parameter	Min	Typ	Max	Unit	Test Conditions
LDO_IN	Charge Input Voltage	4.5	5	5.5	V	—
V <sub>Charge</sub>	Charge Voltage	4.15	4.2	4.25	V	—
I <sub>Charge</sub>	Charge Current	20		320	mA	Charge current at fast charge mode
I <sub>Trinkl</sub>	Trickle Charge Current	20	45	70	mA	V <sub>BAT</sub> < V <sub>Trinkl</sub>

### 2.4 IO Input/Output Electrical Logical Characteristics

#### Confidential

The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

Table 2-4

IO input characteristics						
Symbol	Parameter	Min	Typ	Max	Unit	Test Conditions
V <sub>IL</sub>	Low-Level Input Voltage	-0.3	–	0.3* VDDIO	V	VDDIO = 3.3V
V <sub>IH</sub>	High-Level Input Voltage	0.7* VDDIO	–	VDDIO+0.3	V	VDDIO = 3.3V
IO output characteristics						
V <sub>OL</sub>	Low-Level Output Voltage	–	–	0.33	V	VDDIO = 3.3V
V <sub>OH</sub>	High-Level Output Voltage	2.7	–	–	V	VDDIO = 3.3V

## 2.5 Internal Resistor Characteristics

Table 2-5

Port	General Output	High Drive	Internal Pull-Up Resistor	Internal Pull-Down Resistor	Comment
PA0、PA1 PA5、PA6 PB1, PB8~PB10	8mA	24mA	10K	10K	1、PB1 default pull up 2、USBDM & USBDP default pull down 3、PB5 can pull-up resistance to 5V 4、internal pull-up/pull-down resistance   accuracy ±20%
PC7	Output 0	8mA	10K	10K	
	Output 1	8mA			
PB2、PB5	8mA	–	10K	10K	
USBDP	4mA	–	1.5K	15K	
USBDM	4mA	–	180K	15K	

## 2.6 DAC Characteristics

Table 2-6

Parameter	Min	Typ	Max	Unit	Test Conditions
Frequency Response	20	–	20K	Hz	1KHz/0dB 10Kohm loading With A-Weighted Filter
THD+N	–	-68	–	dB	
S/N	–	95	–	dB	
Crosstalk	–	-90	–	dB	
Output Swing		1		V <sub>rms</sub>	
Dynamic Range		95		dB	1KHz/-60dB 10Kohm loading With A-Weighted Filter
DAC Output Power		20	–	mW	32ohm loading

### Confidential

The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.



## 2.7 ADC Characteristics

Table 2-7

Parameter	Min	Typ	Max	Unit	Test Conditions
Dynamic Range		89		dB	Fsample=44.1kHz Fin=1KHz 2mVpp Input
S/N	–	90	91	dB	Fsample=44.1kHz Fin=1KHz 1.2Vpp Input
THD+N	–	-63	–	dB	
Crosstalk	–	-90	–	dB	

## 2.8 BT Characteristics

### 2.8.1 Transmitter

#### Basic Data Rate

Table 2-8

Parameter	Min	Typ	Max	Unit	Test Conditions
RF Transmit Power		4	6	dBm	25°C, Power Supply VBAT=4.2V 2441MHz
RF Power Control Range		20		dB	
20dB Bandwidth		950		KHz	
Adjacent Channel	+2MHz	-40		dBm	
	-2MHz	-38		dBm	
Transmit Power	+3MHz	-44		dBm	
	-3MHz	-35		dBm	

#### Enhanced Data Rate

Table 2-9

Parameter	Min	Typ	Max	Unit	Test Conditions
Relative Power		-1		dB	25°C, Power Supply VBAT=4.2V 2441MHz
$\pi/4$ DQPSK Modulation Accuracy	DEVM RMS	6		%	
	DEVM 99%	10		%	
	DEVM Peak	15		%	
Adjacent Channel	+2MHz	-40		dBm	
	-2MHz	-38		dBm	
Transmit Power	+3MHz	-44		dBm	
	-3MHz	-35		dBm	

### 2.8.2 Receiver

#### Confidential

The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

**Basic Data Rate****Table 2-10**

Parameter		Min	Typ	Max	Unit	Test Conditions
Sensitivity			-90		dBm	25°C, Power Supply VBAT=4.2V 2441MHz
Co-channel Interference Rejection			-13		dB	
Adjacent Channel	+1MHz		+5		dB	
	-1MHz		+2		dB	
	+2MHz		+37		dB	
Interference Rejection	-2MHz		+36		dB	
	+3MHz		+40		dB	
	-3MHz		+35		dB	

**Enhanced Data Rate****Table 2-11**

Parameter		Min	Typ	Max	Unit	Test Conditions
Sensitivity			-90		dBm	25°C, Power Supply VBAT=4.2V 2441MHz
Co-channel Interference Rejection			-13		dB	
Adjacent Channel	+1MHz		+5		dB	
	-1MHz		+2		dB	
	+2MHz		+37		dB	
Interference Rejection	-2MHz		+36		dB	
	+3MHz		+40		dB	
	-3MHz		+35		dB	

**2.9FM Receiver Characteristics****Table 2-12**

Parameter	Min	Typ	Max	Unit	Test Conditions
Input Frequency	76		108	MHz	
Usable Sensitivity	3	4	8	dB $\mu$ V EMF	(S+N)/N=26dB
Adjacent Channel Selectivity		48		dB	$\pm$ 200kHz
IIP3		88		dB $\mu$ V EMF	$\Delta$ f1=200 kHz, $\Delta$ f2=400 kHz
Audio Output Voltage	0		3	V	Empty Load
Audio Frequency Response	20		20k	Hz	DacTest
Audio (S+N)/N		58		dB	
Stereo Separation		40		dB	
Audio Total Harmonic Distortion (THD)		0.4		%	

**Confidential**

The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

## 3、 Package Information

### 3.1 QSOP24

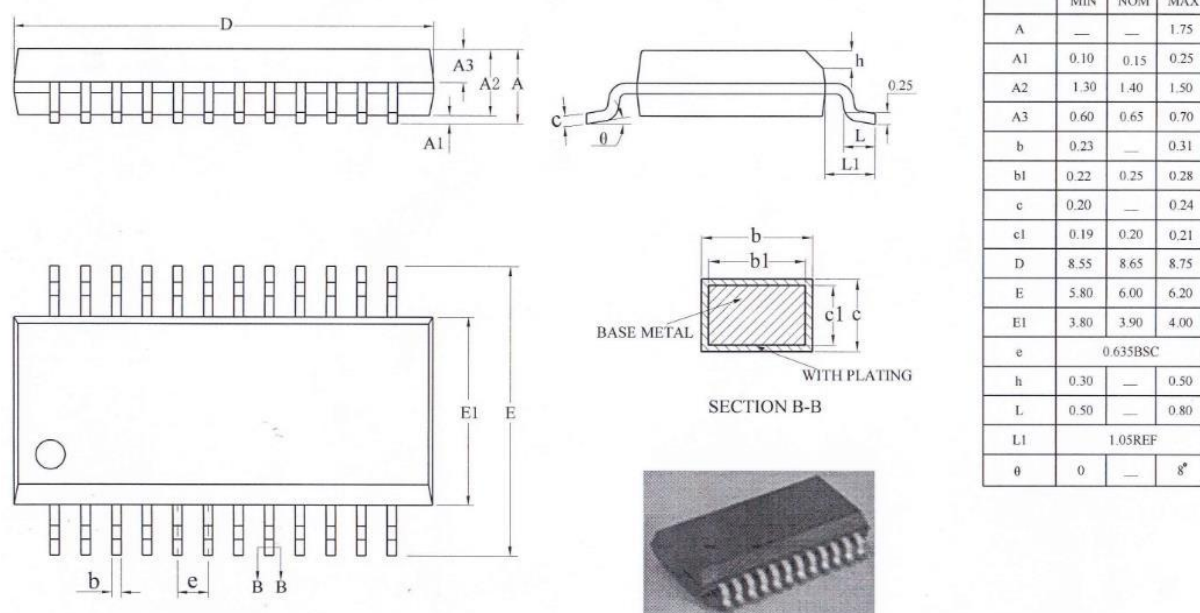


Figure 3-1. AC6955H Package

## 4、 Revision History

Date	Revision	Description
2022.10.21	V1.0	Initial Release
2023.01.11	V1.1	Update Pin Description
2023.04.04	V1.2	Update Package Diagram
2023.12.12	V1.3	Update Bluetooth Vision and profiles
2025.01.09	V1.4	Update Bluetooth Vision and profiles
2026.03.23	V1.5	Update PMU Characteristics
2026.04.07	V1.6	Update PMU Characteristics